

FIG. 1

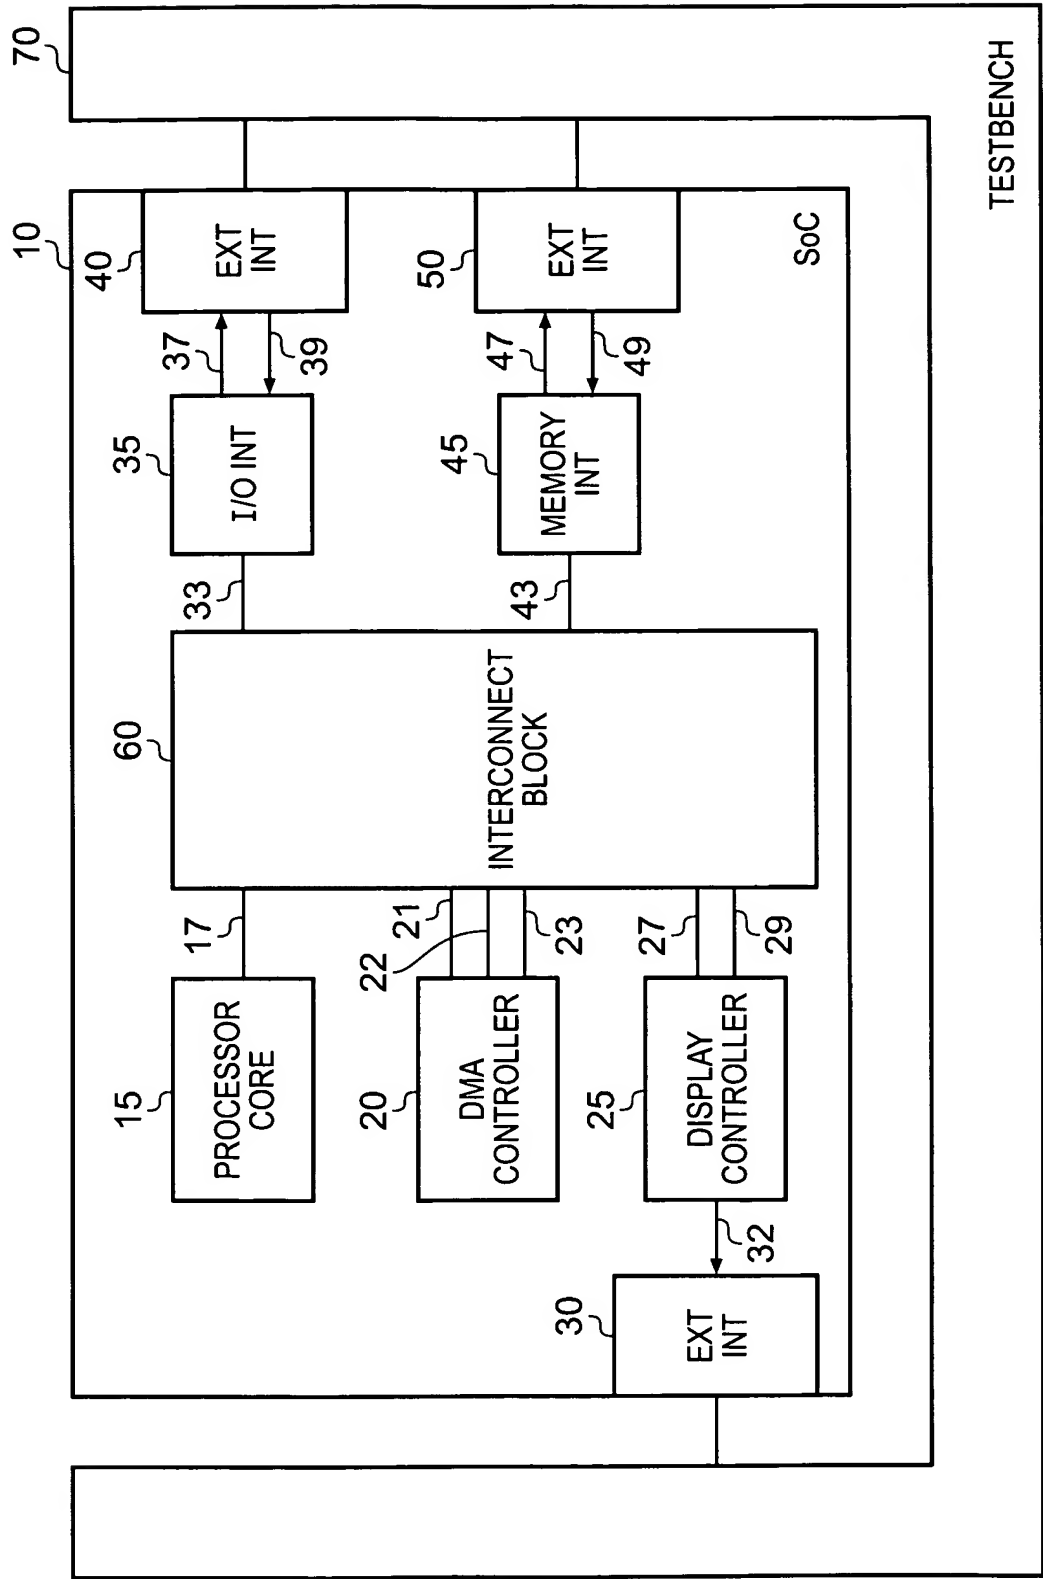


FIG. 2 (Prior Art)

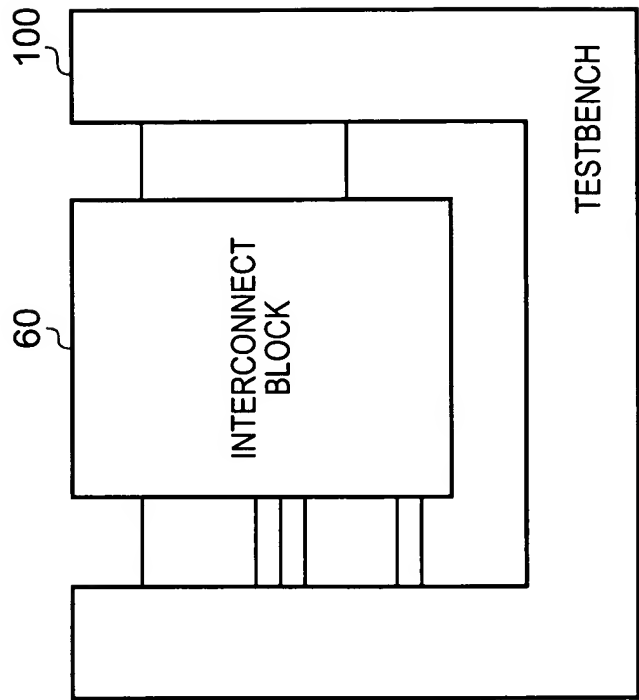


FIG. 3

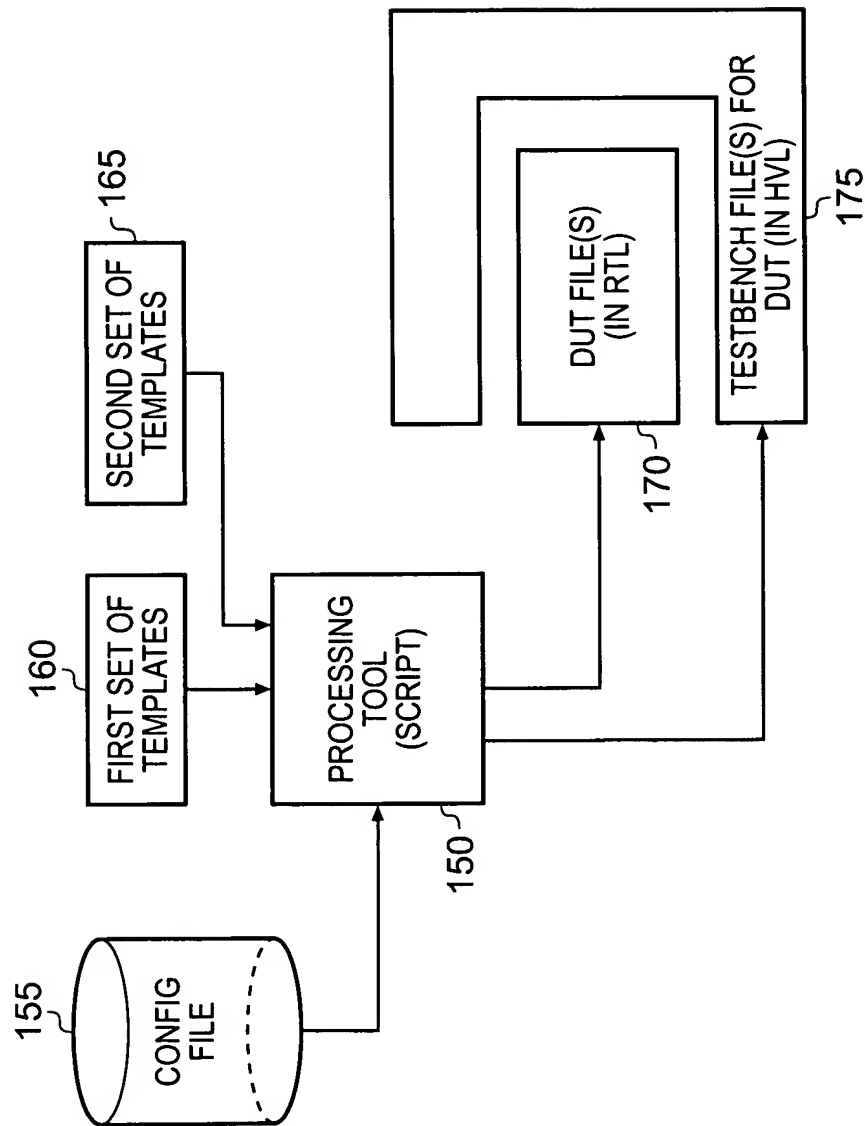


FIG. 4

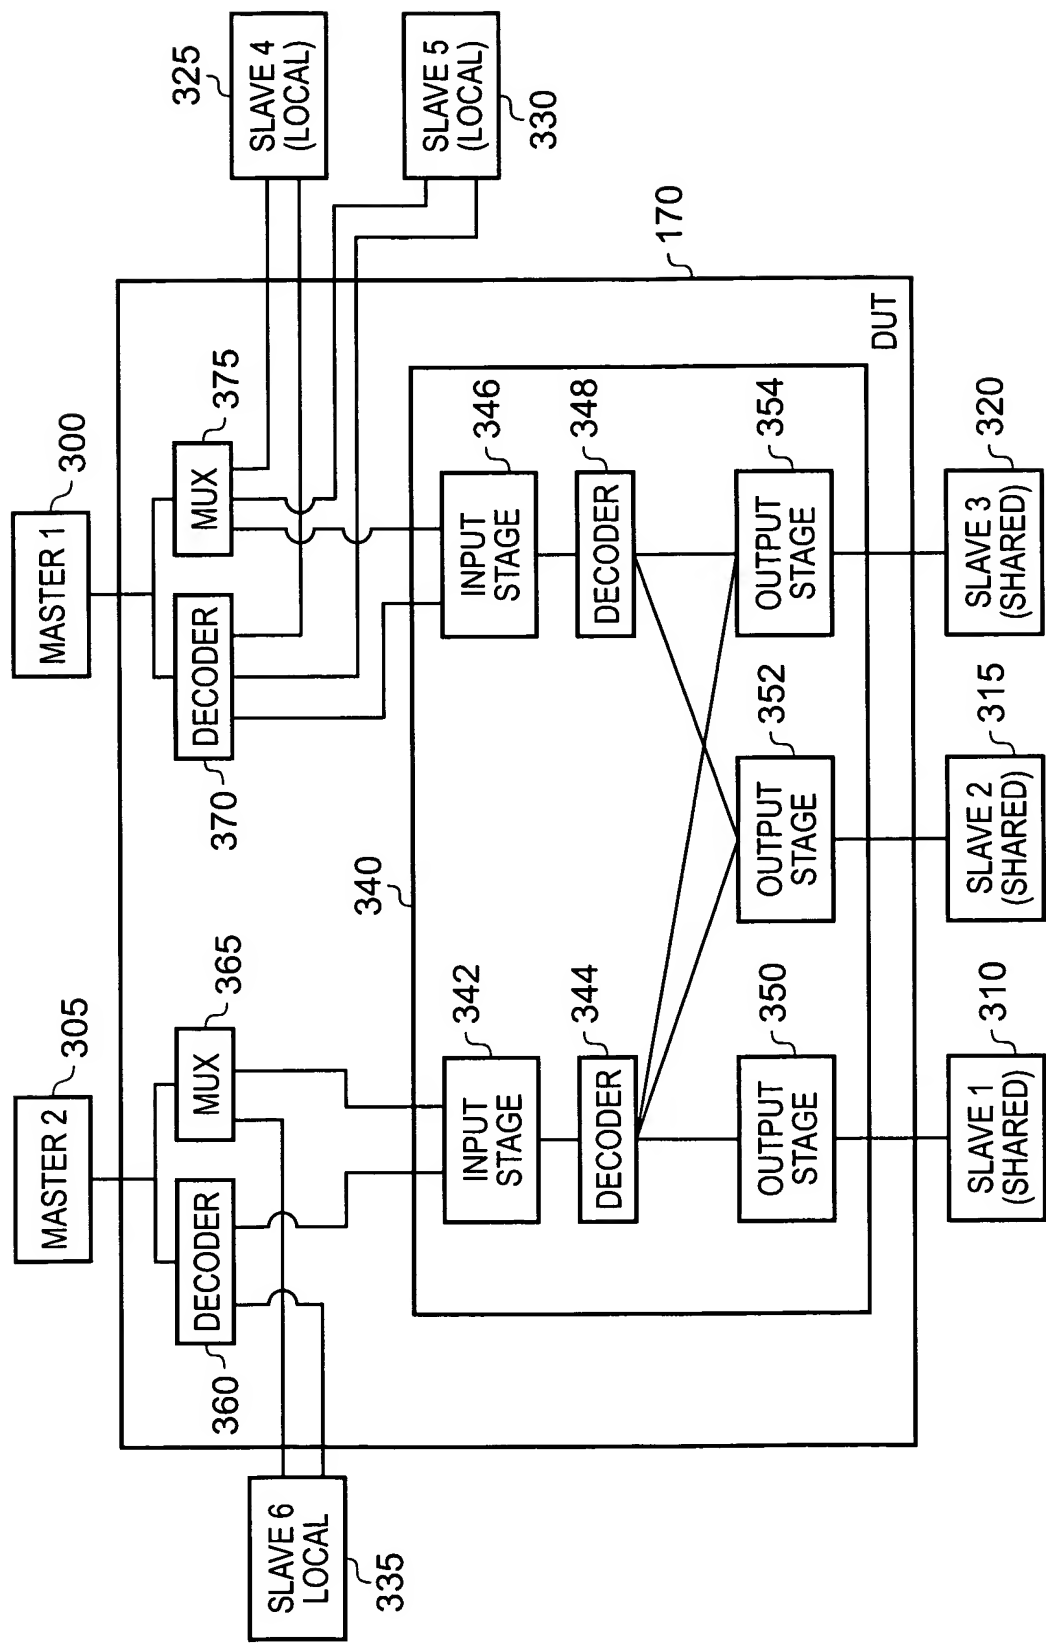


FIG. 5

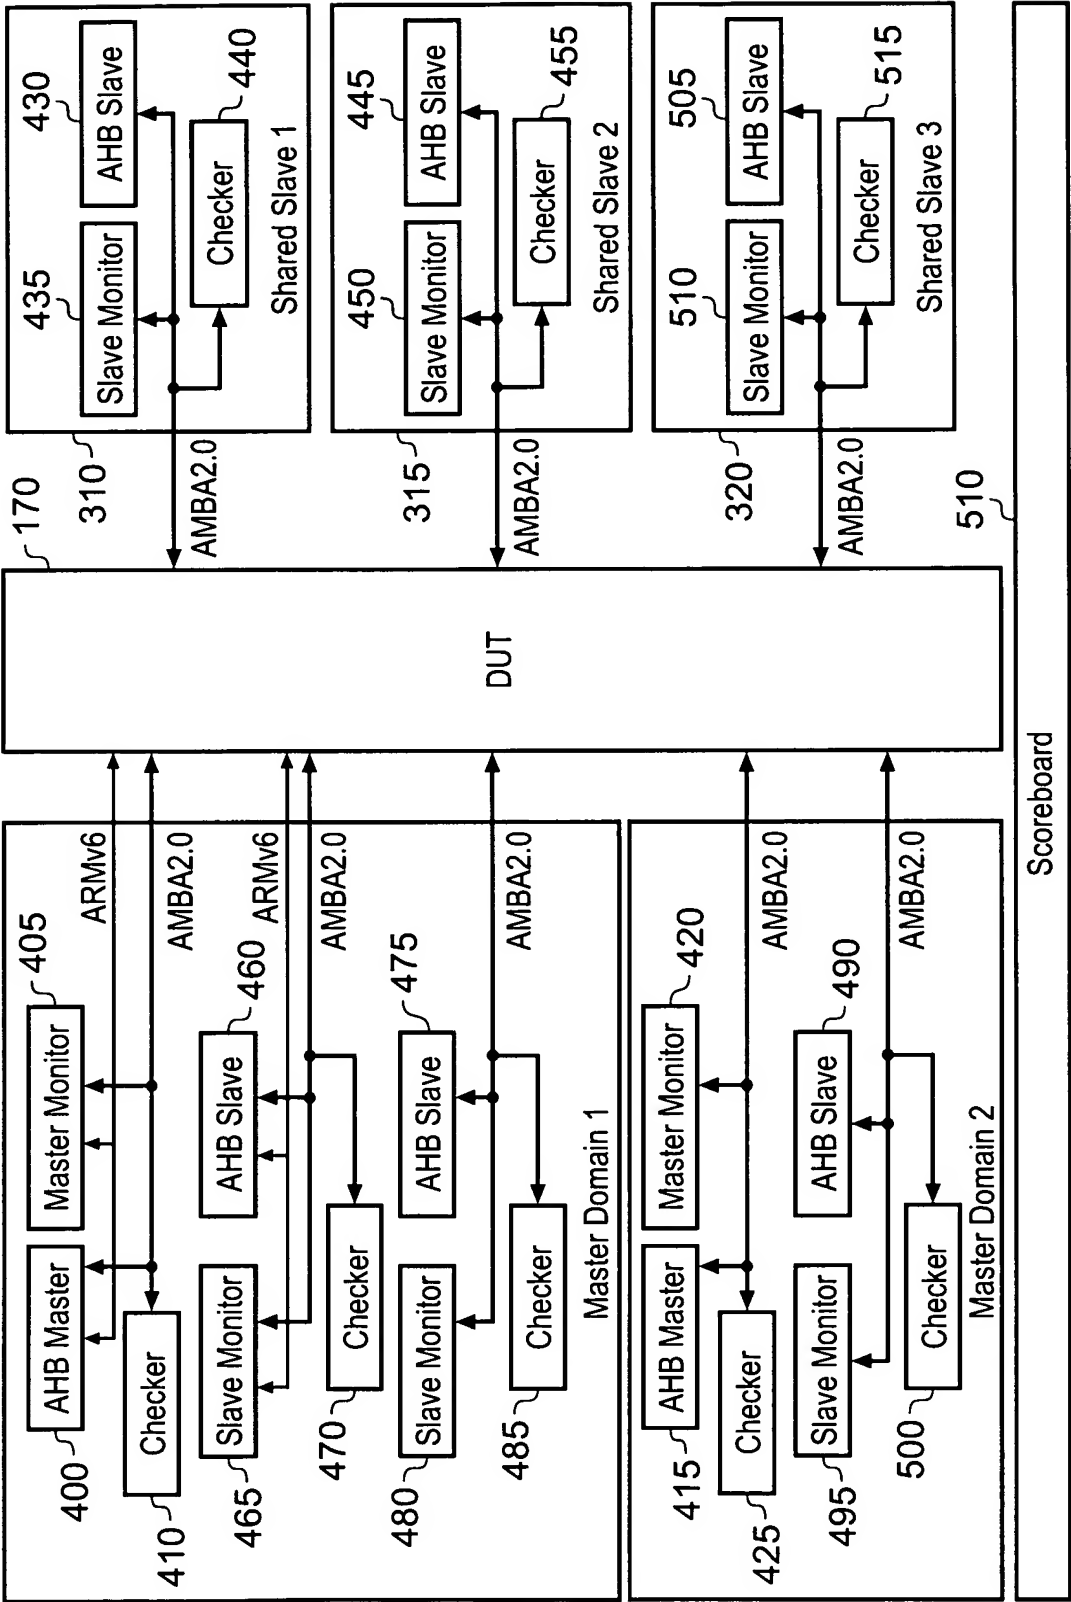


FIG. 6

CONFIG FILE EXTRACT				
M1 (v6)	→	slave 4 local (v6)	→	address map range A → B
		slave 5 local (standard)	→	" " " C → D
		slave 2 shared (standard)	→	" " " E → F
		slave 3 shared (standard)	→	" " " G → H
M2 (STANDARD)	→	slave 6 local (standard)	→	" " " A → D
		slave 1 shared (standard)	→	" " " I → J
		slave 2 shared (standard)	→	" " " E → F
		slave 3 shared (standard)	→	" " " G → H

FIG. 7

8/11

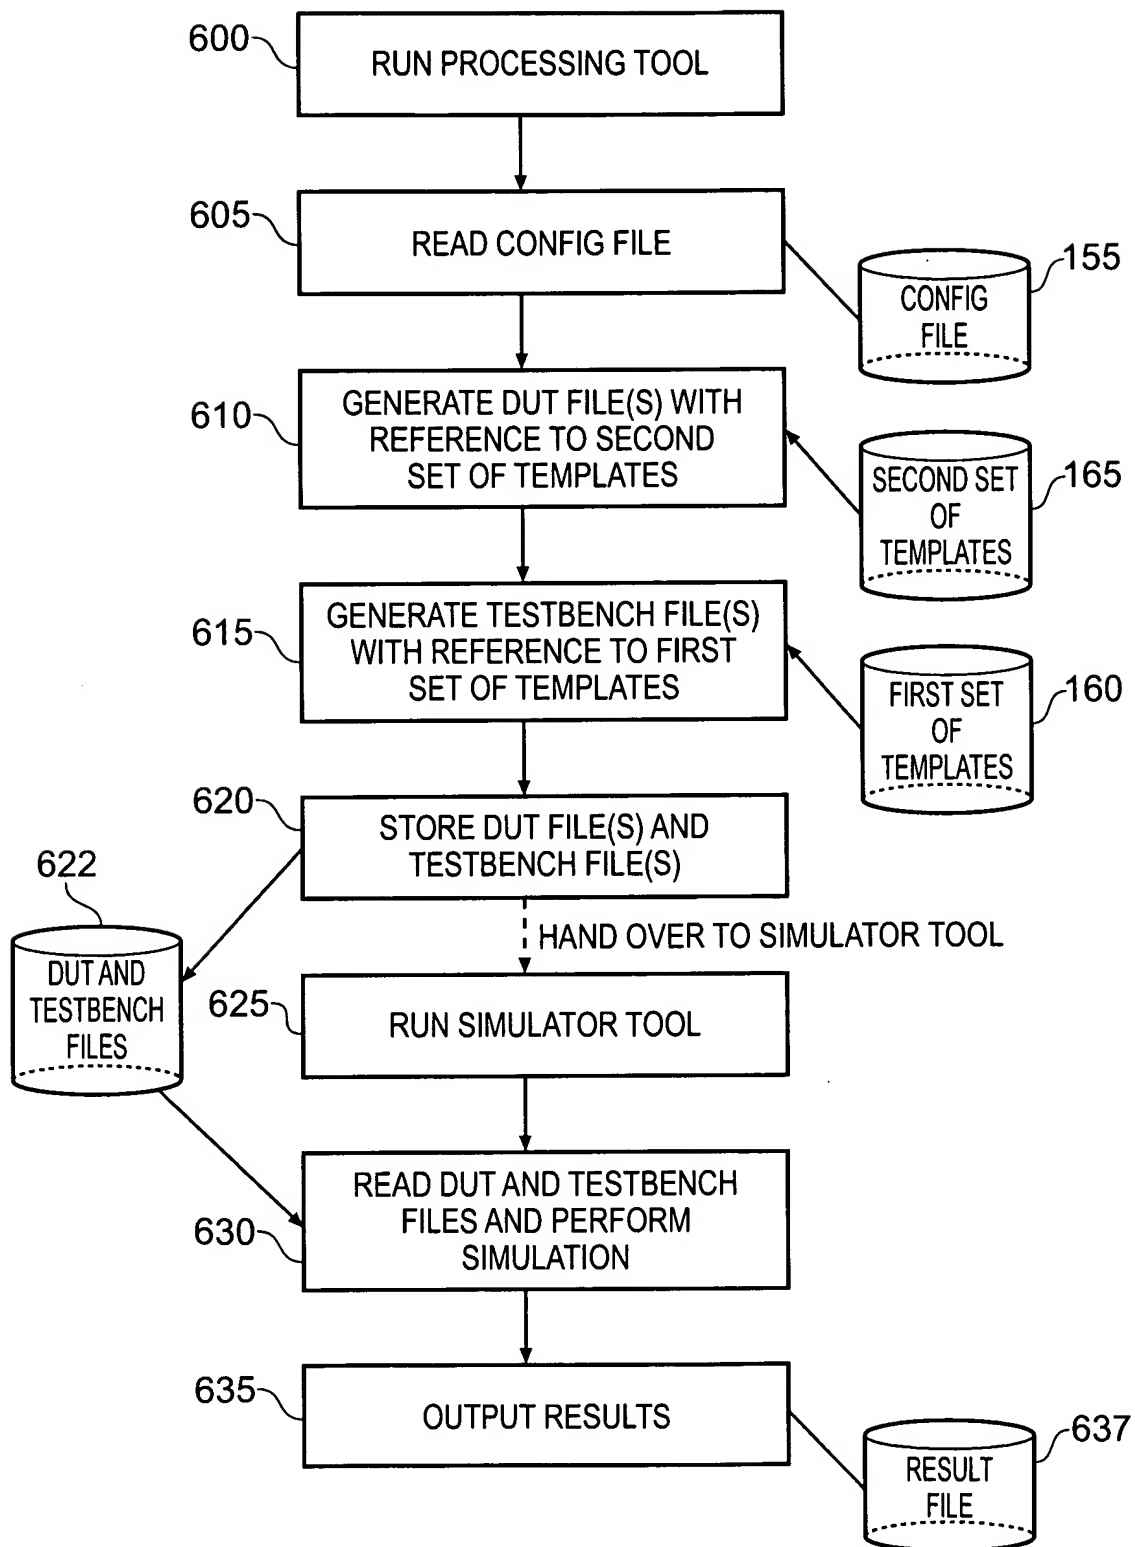


FIG. 8



9/11

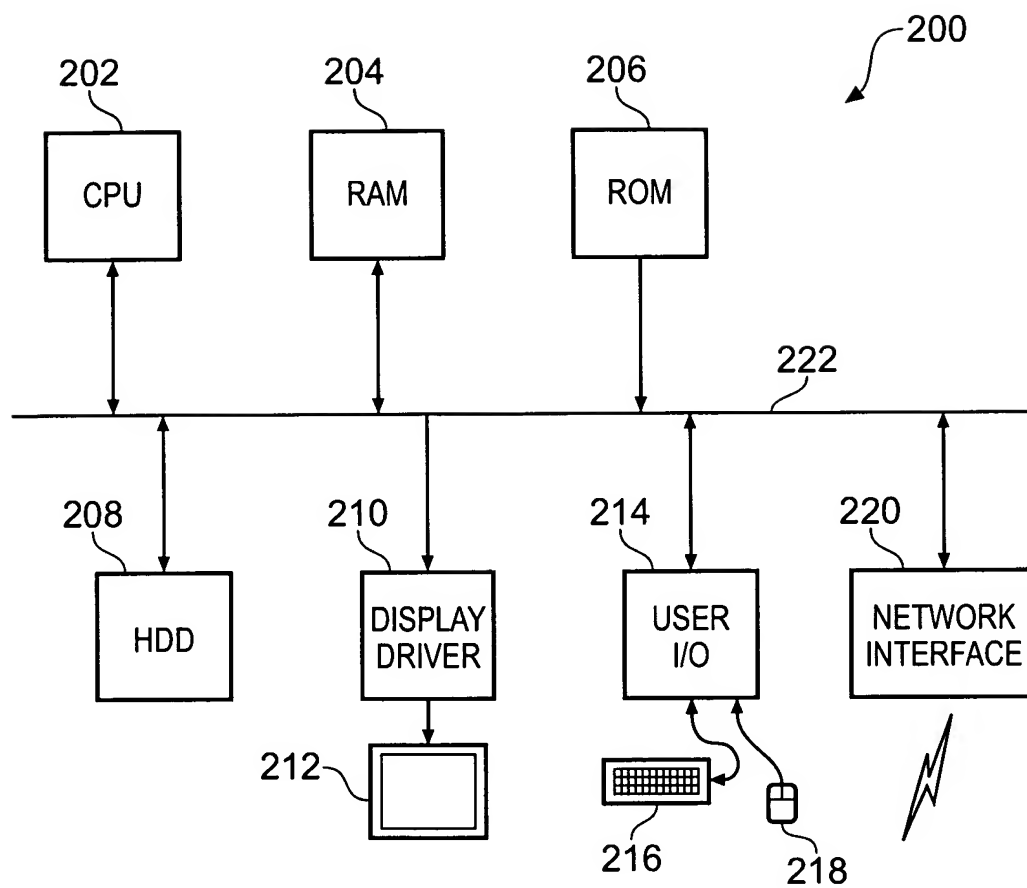


FIG. 9

10/11

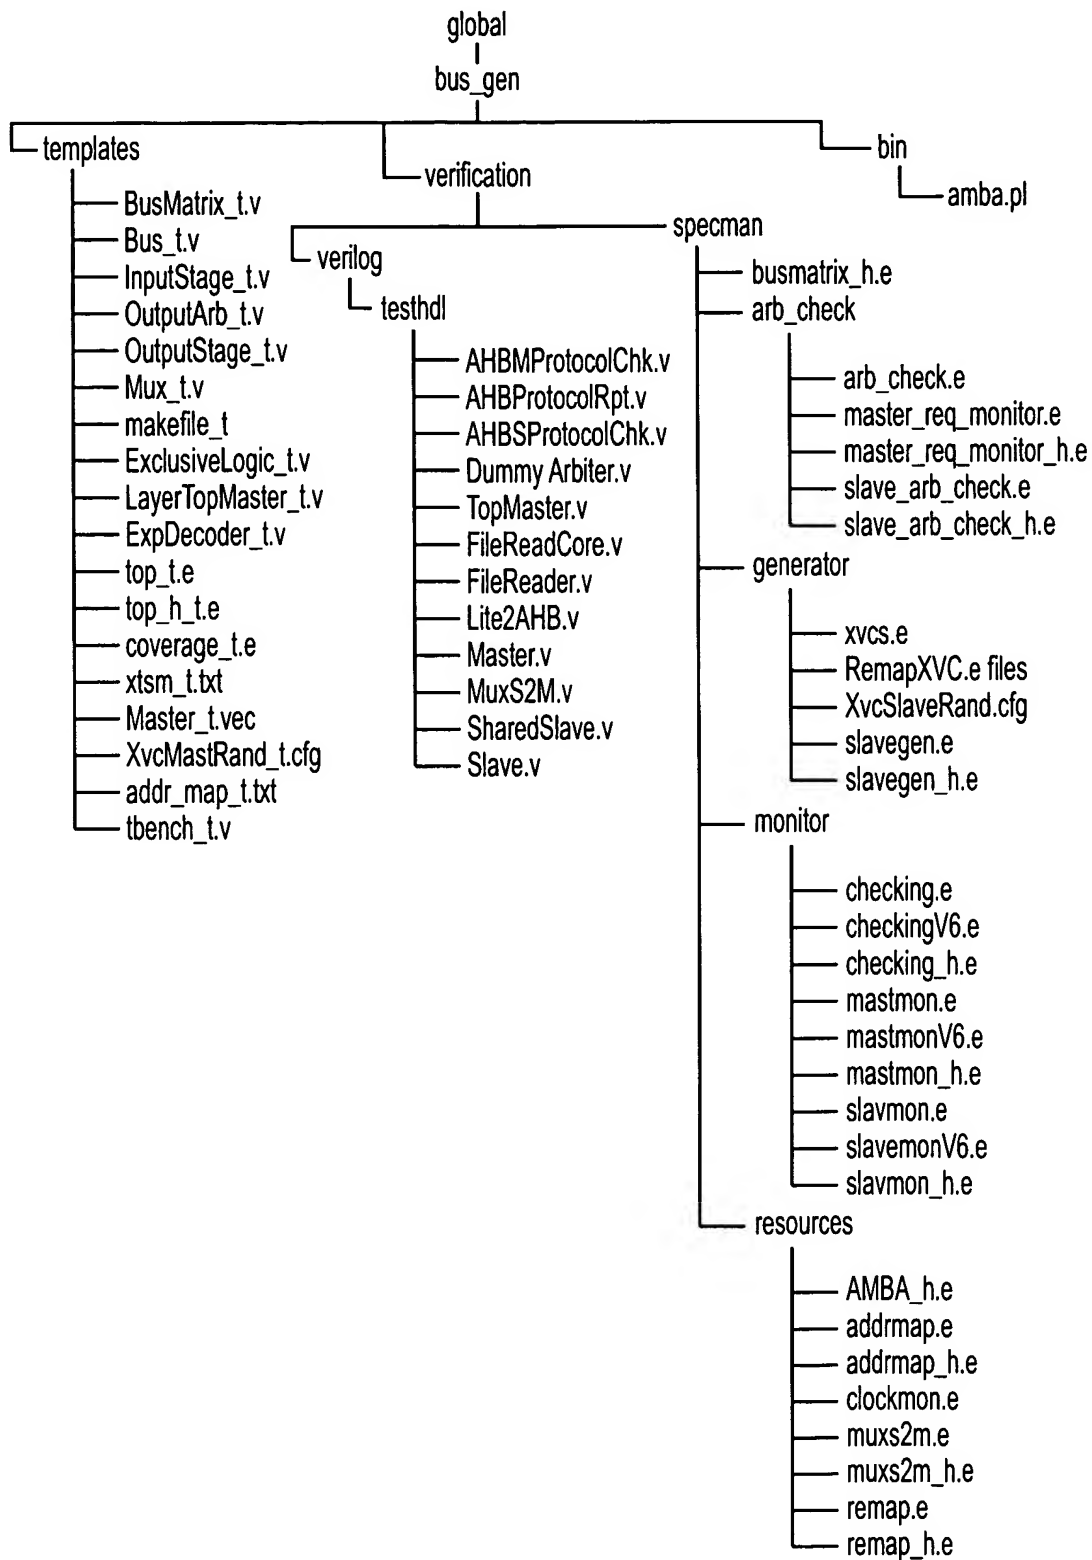


FIG. 10

11/11

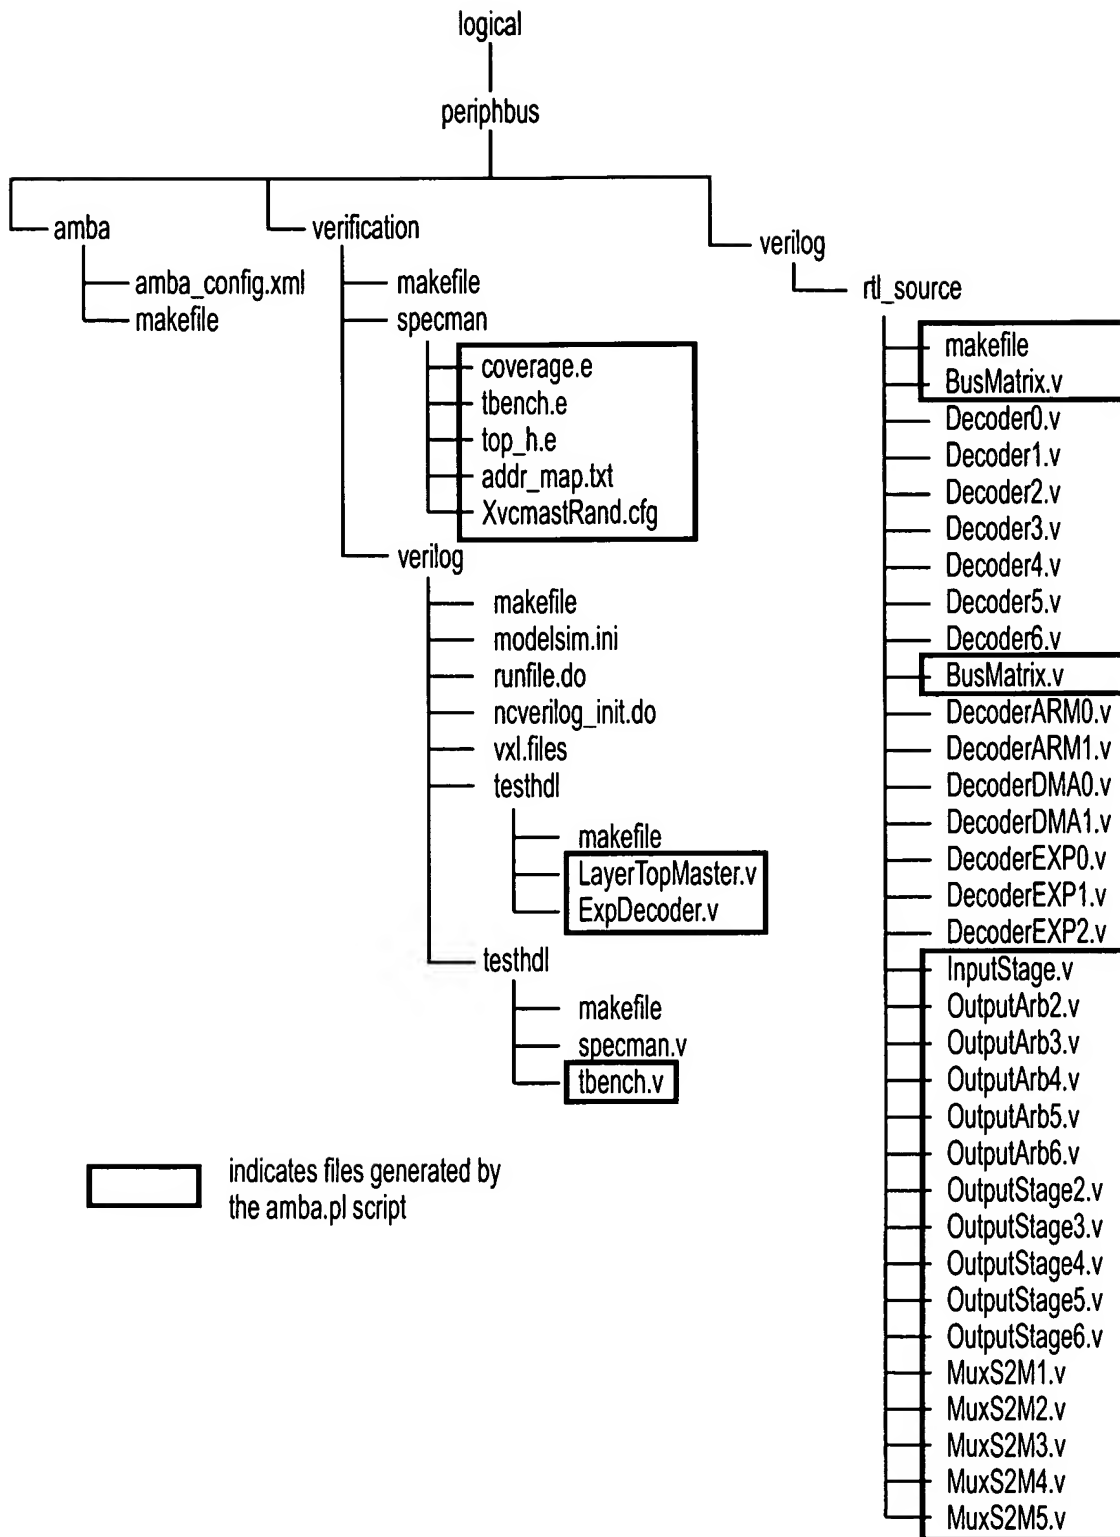


FIG. 11